

CR922 PORTABLE MEDIUM VOLTAGE LOAD BANK


Technicians operating jacking system to lift load bank off of trailer.



Weight: 16,500 lbs
Length: 25'
Width: 102"
Height: 10'
Operating Height: 13' with vertical exhaust



LOAD BANK RENTALS

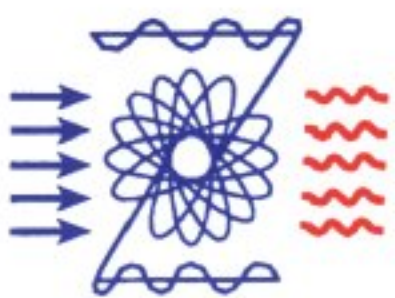

The new CR922 Portable Medium Voltage Load Bank makes 5/15 kV tests really easy. This new design eliminates costly step down transformers, low voltage cables, extra freight, labor and risks associated with them. Direct connect at 4160

(4,000kW) and 13,800 VAC (5,000kW) with shielded cables. Resistive load steps for 5/15 kV are 400/500, 800/1000, 1200/1500, 1600/2000 kW. Equipped with detachable unloading system, no cranes or forklifts required to unload upon arrival.

Call us at **1-888-881-7118** to get a quote for your next test.

Reactive 5/15 kV model to be available soon for 0.8 power factor tests.

ComRent International LLC

www.loadbanks.com