



ComRent International

LOAD BANK RENTALS AND SALES

L69-80 100kW Portable Load Bank The Most Compact 100kW Load Bank Available!

► The L69-80 loadbank is designed to provide a temporary load for field servicing and testing 480VAC and 208VAC three-phase 60HZ generators, UPS's, Inverters and PDU's. 100kW at 480VAC and 80kW at 208VAC. It may also be used to test 240VAC single-phase applications of 6.6 – 52.8kW and 120VAC single-phase applications of 1.7 – 13.3kW.

► The L69-80 may also be used in significant numbers to test and verify HVAC capacity in large Data Centers. The unit is air-cooled and requires a 120VAC line-cord, which feeds the fans and relays.

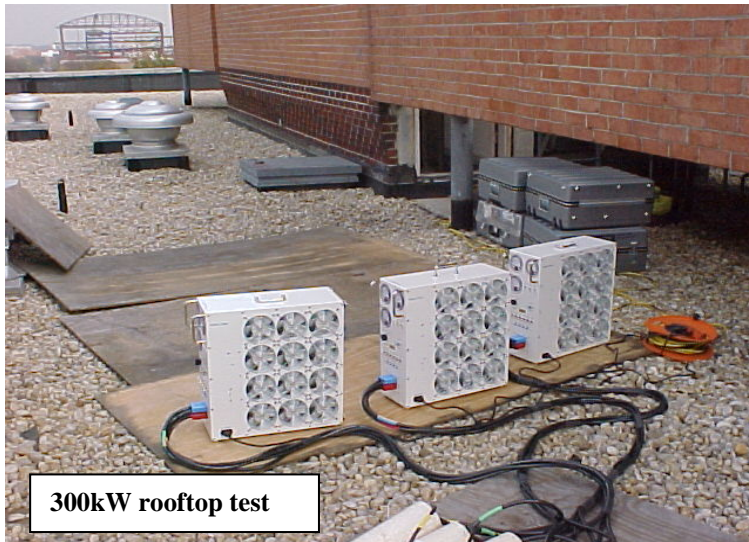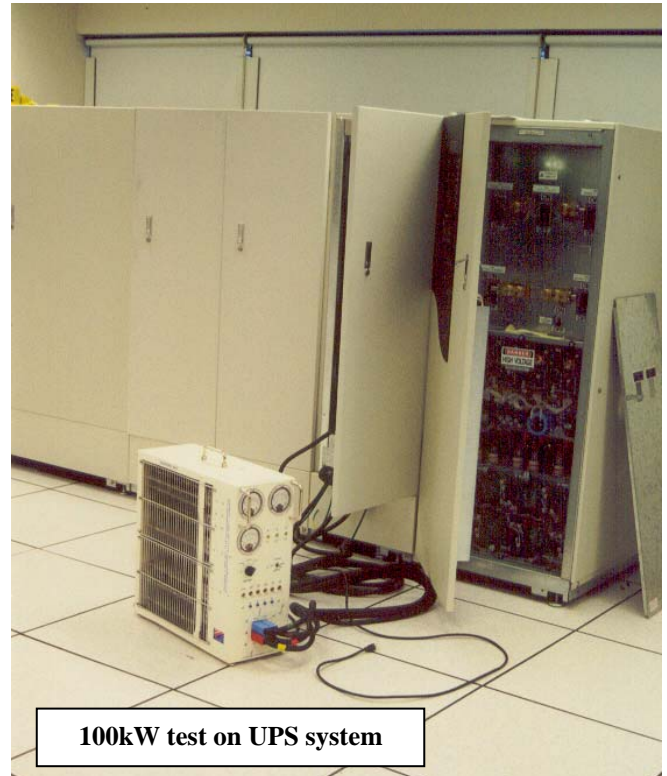

MODEL L69-80 Dimensions

Length.....22"
Width.....8"
Height.....21"
Weight.....60 lbs.
Weight
(with shipping case)110 lbs.

ComRent International is your complete source world wide for load bank rentals, sales, and refurbishments. Products include:
Load Banks 1kW – 30mW • Resistive • Reactive • Capacitive • 1-1000 VDC • Electronic Loads • Power Cables
Medium Voltage Resistive, Reactive & Capacitive • 4mW @ 4160 VAC • 5mW @ 13.8 kV • 20-30mW @ 11-13.8 kV